



 XSIS
Distribution

CATALOGUE SECURITY SENSORS

FLUSH MOUNTING



RTS10

- Cylindrical magnetic contact with brass case and electrically insulated reed for flush mounting
- 4-wires connection (L: 220 mm)
- Dimensions: 30 x 7,5 x 10 mm

** also available with coated cable lenght 450 mm 4-wires*



RTS1P

- Cylindrical magnetic contacts for flush mounting with self-extinguishing and anti-UV abs case
- 4-wires connection (L: 220 mm)
- Dimensions: 30 x 8 x 10 mm



RTSS1

- Miniaturized cylindrical magnetic contact with brass case and electrically insulated reed, for flush mounting
- 4-wire connection (L: 220 mm)
- Dimensions: 8 x 15 x 32 mm



RTS10Z

- Cylindrical magnetic contact with brass case and electrically insulated reed for flush mounting
- Cable lenght: 450 mm
- Dimensions: 25 x 7,5 x 10 mm



RTCO

- Cylindrical magnetic contact for safes with brass case and electrically insulated reed , for flush mounting
- 4-wires connection (L: 220 mm)
- Dimensions: 29 x 20 x 24 mm

SURFACE MOUNTING



RTC3ZN

- Prismatic magnetic contact with metal alloy case and electrically insulated reed, for surface mounting
- Cable length : 450 mm
- Dimensions : 50 x 19 x 13 mm



RTR2M

- Prismatic magnet contact with terminals and self-extinguishing anti-UV, nylon case, for surface mounting
- Dimensions: 51 x 11 x 9 mm

** also available in brown colour*



RTR2P

- Prismatic magnetic contact self-extinguishing anti-UV abs case, for surface mounting
- 2-wires connection (L: 220 mm)
- Dimensions: 47 x 29 x 9 mm



RTR2Z

- Prismatic magnetic contact with metal alloy case and electrically insulated reed, for surface mounting
- 2-wire connection (L: 220 mm)
- Dimensions: 47 x 29 x 9 mm



RTR3Z

- Prismatic magnetic contact with metal alloy case and electrically insulated reed, for surface mounting
- 4-wires connection (L: 220 mm)
- Dimensions: 8 x 15 x 32 mm



RTUP4

- Miniaturized ultra-flat pack contact with self-extinguishing anti-UV nylon case , double extrapower magnet, for surface mounting and nbsp;
- 4-wires connection (L: 220 mm)
- Dimensions: 46 x 11 x 5 mm

** also available in brown colour*



RTUP6

- Ultra-flat pack contact with self-extinguishing anti- UV nylon case, for surface mounting
- 2-wires connection (L: 220 mm)
- Dimensions : 26 x 18 x 5 mm

** also available in brown colour*



RTUP8

- Ultra-flat pack contact with self-extinguishing anti-UV nylon case, doule magnet, for surface mounting
- 2-wires connection (L: 220 mm)
- Dimensions: 50 x 15 x 4,5 mm

** also available in brown colour*



RTC3Z

- Prismatic magnetic contact with metal alloy case and electrically insulated reed, for surface mounting
- Cable lenght: and nbsp;450 mm
- Dimensions : 55 x 19 x 13 mm

OSCILLATING DOORS



RTSC4P

- Armoured prismatic magnetic contact, for oscillating doors, with self-extinguishing anti-UV nylon case, for surface mounting
- Sensor dimensions : 150 x 41 x 13 mm
- Magnet dimensions: 60 x 29 x 30 mm



RTSC4Z

- Armoured prismatic magnetic contact, for oscillating doors, with metal alloy case and electrically insulated reed, for surface mounting
- Sensor dimensions: 150 x 41 x 13 mm
- Magnet dimensions: 60 x 29 x 30 mm

ROLLER SHUTTER




RTATF two poles terminal

- Roller shutter sensor
- 2 poles terminal blocks connection
- Dimensions : 107 x 105 x 19 mm




RTATF two wires outlet

- Roller shutter sensor
- 2-wires connection (L: 150 mm)
- Dimensions : 107 x 105 x 19 mm

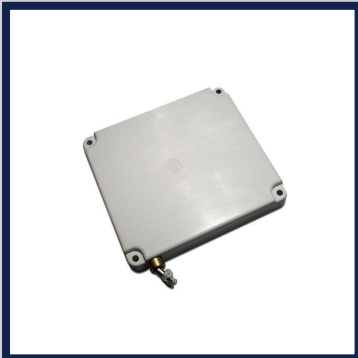

RTATF micro two poles terminal

- Micro roller shutter sensor
- 2 poles terminal blocks connection
- Dimensions : 92 x 84 x 16 mm

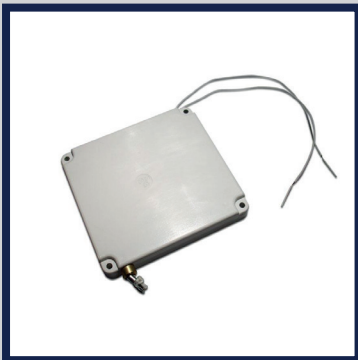

RTATF micro two wires outlet

- Micro roller shutter sensor
- 2-wires connection (L: 150 mm)
- Dimensions : 92 x 84 x 16 mm



NEW TYPE

RTATF wheel operated

- Wheel operated shutter sensors
- 4 poles terminal bloks
- Dimensions: 80 x 26 x 17 mm

*also available in brown color



ExSIS Distribution srl

Via Trieste, 25

20096 Seggiano di Pioltello (MI) - Italy

phone (039)02/92271552 - fax (039)02/94750560

info.exsis@exsis.it - www.exsis.it