

MS-324-4



MS-324-4




Form C Reed Sensor Flatpack

Electrical Characteristics		@ 25 °C
Contact form		C
Contact rating max.	W / VA	5
Switching voltage max.	VDC	175
	VAC	120
Switching current max.	A	0.25
Carry current max.	A	1.5
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ⁹

Features
➤ Compact size
➤ Adjustable switching point
➤ Various sensitivity ranges available
➤ Customized types available


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	15 - 30
Drop out min.	AT	5
Test coil	TC	200
Test equipment tolerance	± AT	2

Approvals

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	100
Resonant frequency typ.	Hz	1100
Operate time max. (incl. bounce)	ms	0.7
Release time max.	ms	1

Environmental Characteristics		
Operating temperature	°C	-20 to +85
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	50

Dimensions in mm

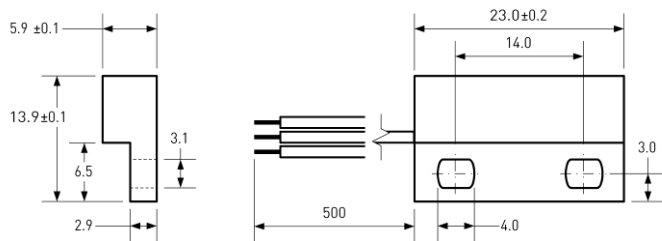
Ordering Information	
Packing Unit	50 pcs
Weight per piece	6.3 g
Weight per package	325 g
Standard AT Ranges	
	2 = 15 to 20 AT
	3 = 20 to 25 AT
	4 = 25 to 30 AT
Ordering Example	
MS-324-4-2 describes MS-324-4 with 15 to 20 AT.	

MS-324-4





MS-324-4

Form C Reed Sensor Flatpack

Material Information

	Material	Colour
Housing	ABS	black
Cable	UL 1007/1569, AWG 26, 4 mm stripped and tinned	COM: black, NO: grey, NC: white
Potting compound	Epoxy	black

Test Procedure of final Reed Sensor

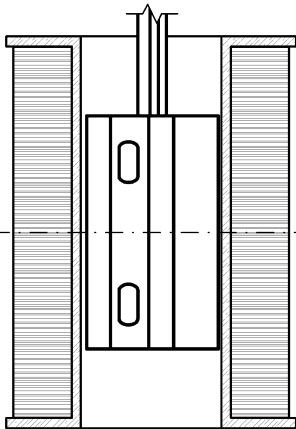

Test Coil placed in vertical position

Reed Sensor aligns with bottom line

Reed Sensor pushed into opposite corner of Test Coil

Test Parameters

Test coil	TC-324
Test programs	
AT range	Test program
2 =	MS-324-4-2
3 =	MS-324-4-3
4 =	MS-324-4-4

Remarks

When mounted onto ferromagnetic parts switching distance of MS-324-4 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Only non-ferromagnetic screws to be used for mounting.

Matching actuator MSM-324 available as well.