

HS-3511-01-0300




Product image serves as example only.

HS-3511-01-0300

Bipolar 3 - Wire

Flange Mount Hall Effect Sensor

Block Diagram

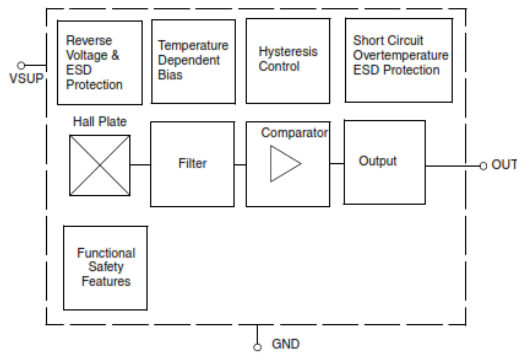

Features

- Customized types available
- Operates with magnetic fields up to 12 kHz
- Open drain output
- Very high sensitivity
- Ultra compact housing


Approvals



Recommended Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit	Conditions
V _{SUP}	Supply voltage	2,7	–	24	V	
V _{OUT}	Output voltage	–	–	24	V	
I _{OUT}	Output current	–	–	25	mA	

Dimensions

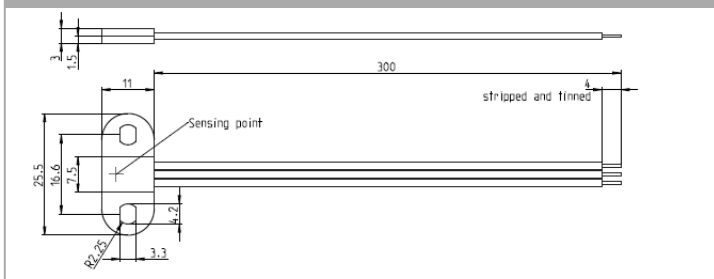

Wire Assignment

Name	Function	Cable colour
V _{SUP}	Supply Voltage	red
OUT	Output	white
GND	Ground	black

HS-3511-01-0300
 wire length (mm)

Material Information

	Material	Colour
Housing	PA6	black
Cable	UL 1007 AWG 24	red, white, black
Potting	Epoxy	black

Environmental Characteristics

Operating temperature	°C	- 20 to + 85
-----------------------	----	--------------

HS-3511-01-0300



HS-3511-01-0300

Bipolar 3 - Wire

Flange Mount Hall Effect Sensor

Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Conditions
Supply						
V _{UV}	Undervoltage threshold	2	–	2,7	V	
I _{SUP}	Supply current	1,1	1,6	2,4	mA	
I _{SUPR}	Reverse current	–1	–	–	mA	for V _{SUP} = –18 V
Port Output						
V _{OL}	Port low output voltage	–	0,13	0,4	V	I _O = 20 mA
		–	–	0,5	V	I _O = 25 mA
I _{OLEAK}	Output leakage current	–	0,1	10	µA	
t _f	Output fall time ¹⁾	–	–	1	µs	V _{SUP} = 12 V; R _L = 820 Ω; C _L = 20 pF
t _r	¹⁾	–	–	1	µs	
B _{NOISE}	Effective noise of magnetic switching points (RMS) ²⁾	–	72	–	µT	For square wave signal with 12 kHz
t _J	Output jitter (RMS) ¹⁾	–	±0.58	±0.72	µs	For square wave signal with 1 kHz. Jitter is evenly distributed between –1 µs and +1 µs
t _d	Delay time ^{2),3)}	–	16	21	µs	
t _{SAMP}	Output refresh period ²⁾	1,6	2,2	3	µs	
t _{EN}	Enable time of output after exceeding of V _{UV} ⁴⁾	20	50	60	µs	V _{SUP} = 12 V B > B _{ON} +2 mT or B < B _{OFF} – 2 mT

- 1) Characterized on small sample size, not tested
- 2) Guaranteed by design
- 3) Systematic delay between magnetic threshold reached and output switching
- 4) If power-on self-test is executed, t_{EN} will be extended by power-on self-test period

Absolute Maximum Ratings

Stresses beyond those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device
Functional operation of the device at these conditions is not implied. Exposure to the absolute rating conditions for extended periods will affect device reliability

Symbol	Parameter	Min.	Max.	Unit	Conditions
V _{SUP}	Supply voltage	–18	28	V	t < 96 h ¹⁾
		–	32	V	t < 5 min ¹⁾
		–	40	V	t < 10 x 400 ms "Load-Dump" ¹⁾ with series resistor R _V > 100 Ω.
V _{OUT}	Output voltage	–0.5	28	V	t < 96 h ¹⁾
I _O	Output current	–	65	mA	
I _{OR}	Reverse output current	–50	–	mA	

- 1) No cumulative stress

HS-3511-01-0300



HS-3511-01-0300

Bipolar 3 - Wire


Flange Mount Hall Effect Sensor

Magnetic Characteristics

Parameter	On point B_{ON}			Off point B_{OFF}			Hysteresis B_{HYS}			Unit
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
T_J										
-40 °C	-0.6	0,5	1,6	-1.6	-0.5	0,6	-	1	-	mT
25 °C	-0.5	0,4	1,5	-1.5	-0.4	0,5	-	0,8	-	mT
170 °C	-1.0	0,35	2	-2.0	-0.35	1	-	0,7	-	mT

¹⁾ The hysteresis is the difference between the switching points $B_{HYS} = B_{ON} - B_{OFF}$

Off-center position of sensing point



Note: The output turns to Low-Z with the magnetic south pole on the top side of the package and turns into High-Z with the magnetic north pole on the top side. The output state is not defined if the magnetic field is removed again. For correct function in the application, the sensor requires both magnetic polarities (north and south) on the top side of the package.

Magnetic Approach (for example)

