

## MS-328-6



## MS-328-6

Power Reed Sensor Flatpack

### Electrical Characteristics @ 25 °C

Contact form		A
Contact rating max.	W / VA	50
Switching voltage max.	VDC	200
	VAC	250
Switching current max.	A	1.5
Carry current max.	A	2
Breakdown voltage min.	VDC	400
Total resistance max. (initial)	mΩ	150
Insulation resistance min.	Ω	10 <sup>10</sup>

### Features

- Sensor with Power Reed Switch
- Adjustable switching point
- Various sensitivity ranges available
- typ. Load resistive

### Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	25 - 40
Drop out min.	AT	5
Test coil	TC -	020
Test equipment tolerance	± AT	2

### Approvals



### Operating Characteristics (of unmodified Reed Switch) @ 25 °C

Switching frequency max.	Hz	300
Resonant frequency typ.	Hz	2600
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

### Environmental Characteristics

Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	50

### Ordering Information

Packing Unit	25 pcs
Weight per piece	10.8 g
Weight per package	280 g
Standard AT Ranges	

- 4 = 25 to 30 AT
- 5 = 30 to 35 AT
- 6 = 35 to 40 AT

### Ordering Example


MS-328-6-4 describes MS-328-6 with 25 to 30 AT.

### Remarks

When mounted onto ferromagnetic parts switching distance of MS-328-6 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

### Dimensions in mm

© PIC GmbH

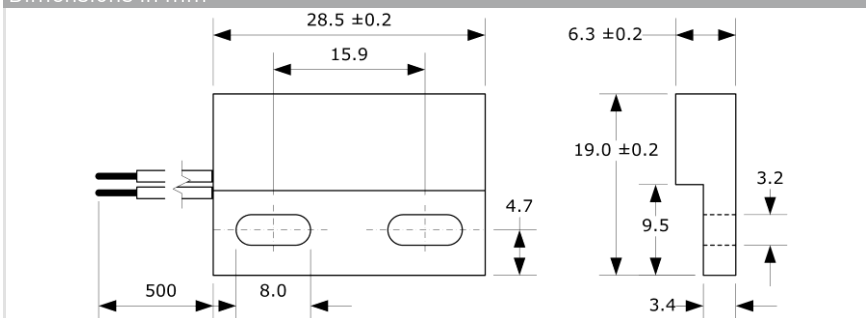

### Material Information

	Material	Colour
Housing	PA-GF	black
Cable	UL 1007/1569, AWG 20, 4 mm stripped and tinned	black
Potting compound	Epoxy	black