




Magnet Float

REACH

Float housing	PP Foam -black (for use in water and diluted acids)
Magnet	NdFeB, N35
Magnetical Orientation	axially

Remanence Br	mT	1185
Coercivity HcB	kA/m	828
Coercivity HcJ	kA/m	955
Energy Product (BH) max.	kJ/m ³	275
Magnetic Moment M	x10 ⁻⁵ Vs cm	1.6
Operating Temperature max.	°C	80

Dimensions in mm

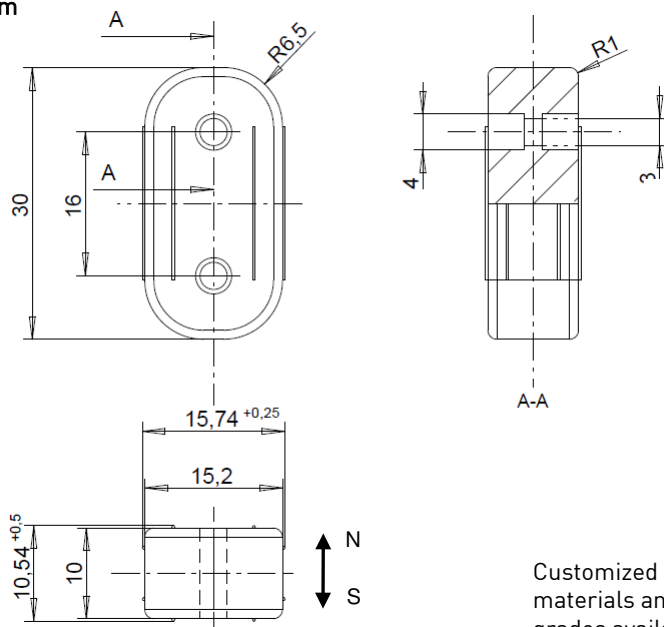

Customized types, other magnet materials and high temperature grades available

@ 25°C

Density of float typ. *	g/cm ³	0.88
Weight per piece	g	3.5

Page 1 of 1
Rev. 1.1, 06.07.2017, (000, 001, 009)
Pfmppq002_ds_e_1.1

PIC Proximity Instrumentation Controls
Kontaktbauelemente GmbH

Nibelungenstr. 5A
90530 Wendelstein, Germany

Phone +49 9129 907089-0
Fax +49 9129 907089-99

info@pic-gmbh.com
pic-gmbh.com