

MS-328-4



MS-328-4

Form C Reed Sensor Flatpack

Electrical Characteristics @ 25 °C

Contact form		C
Contact rating max.	W / VA	5
Switching voltage max.	VDC	175
	VAC	120
Switching current max.	A	0.25
Carry current max.	A	1.5
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	150
Insulation resistance min.	Ω	10 ⁹

Features

- Adjustable switching point
- Customized types available
- Various sensitivity ranges available
- typ. Load resistive

Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	15 - 30
Drop out min.	AT	5
Test coil	TC -	200
Test equipment tolerance	± AT	2

Operating Characteristics (of unmodified Reed Switch) @ 25 °C

Switching frequency max.	Hz	100
Resonant frequency typ.	Hz	1100
Operate time max. (incl. bounce)	ms	0.7
Release time max.	ms	1

Approvals



Environmental Characteristics

Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	50

Ordering Information

Packing Unit	25 pcs
Weight per piece	9.7 g
Weight per package	255 g
Standard AT Ranges	

- 2 = 15 to 20 AT
- 3 = 20 to 25 AT
- 4 = 25 to 30 AT

Ordering Example


MS-328-4-2- describes MS-328-4 with 15 to 20 AT.

Remarks

When mounted onto ferromagnetic parts switching distance of MS-328-4 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Dimensions in mm

© PIC GmbH

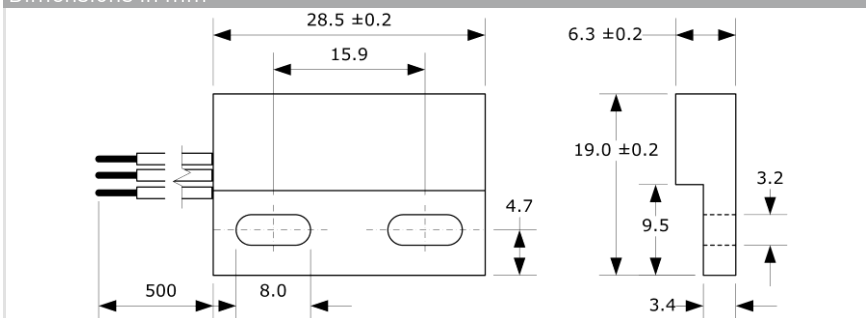

Material Information

Housing	Material: PA-GF	Colour: black
Cable	UL 1061, AWG 22, 4 mm stripped and tinned	COM: black, NO: grey, NC: white
Potting compound	Epoxy	black